

## Portable Compressors MOBILAIR M 80 / M 100

With the world-renowned SIGMA PROFILE 

Free air delivery 8.1/10.2 m<sup>3</sup>/min



**Made in Germany**




KAESER's renowned MOBILAIR range of portable compressors is manufactured in a state-of-the-art production facility located directly next to the KAESER main plant in Coburg, Northern Bavaria. Equipped with the very latest technology, the recently modernised portable compressor plant boasts TÜV (German Technical Inspection Agency) certified sound testing facilities for free-field sound level measurement, an advanced powder coating installation and efficient production logistics. With minimal turn-around time, KAESER's highly qualified personnel are able to assemble portable compressors of all sizes and equipment levels to suit our customers' specific needs.

**Durable and versatile**

The M 80 and M 100 are in a class of their own when it comes to versatility, as they can be precisely tailored to meet the needs of the relevant application. Options include air treatment components, a three-phase synchronous generator, a choice of a fully galvanised chassis with overrun brake and a fixed or height adjustable tow bar, or stationary versions either installed on skids or machine mountings.

**A look under the enclosure**

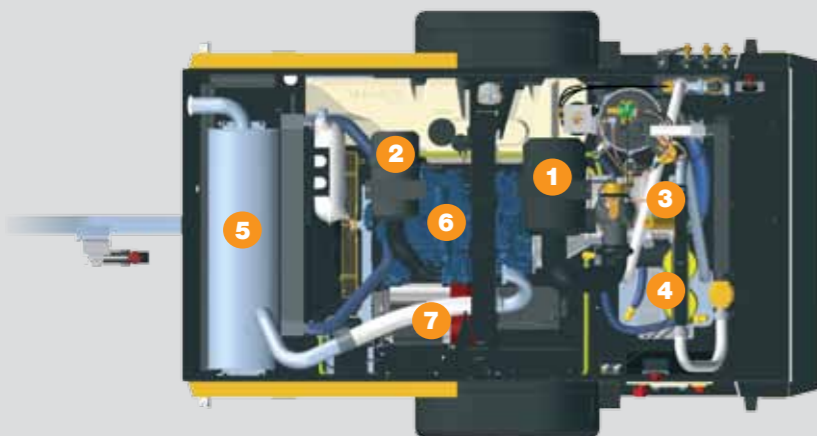

**MOBILAIR M 80 / M 100**  
**Portable versatility**



**Large enclosure doors:**  
Optimal component accessibility for ease of maintenance.

**Fully galvanised Alko chassis**  
Tow bar height can be adjusted from 420 to 1080 mm

- 1 Compressor air filter
- 2 Engine air filter
- 3 SIGMA airend
- 4 Compressed air treatment (optional)
- 5 Internal exhaust silencer (protected from potential damage)
- 6 Diesel engine
- 7 Generator (optional)



**Patented Anti-Frost Control**

For M 80 / M 100 models without compressed air treatment or with compressed air heat feedback, KAESER's patented Anti-Frost Control automatically regulates operating temperature in relation to ambient. Together with an optional tool lubricator, the Anti-Frost Control prevents compressed air tools from freezing up, even with cold outside temperatures, thereby enhancing both availability and durability.



**Ambient temperature**

In addition to standard models which can be used in ambient temperatures ranging from -10 °C to +50 °C, a version suited to use at lower ambient temperatures is also available.



**Air and power**

Single-source air and generator power. The user is able to take advantage of simultaneous compressed air and generator power anytime, anywhere.



**The perfect energy-saving combination: Kubota engines and KAESER rotary screw compressors**

The M 80 and M 100 feature a specially designed energy-saving SIGMA profile airend, which operates at low speed and is driven by a water-cooled four-cylinder Kubota diesel engine. A fuel filter with water separation capability further enhances reliability and is fitted as standard.

# MOBILAIR M 80 / M 100 – Exceptional power and versatility




## Simple to operate

The user-friendly control and instrument panel – which can be equipped with a cover flap if required – enables all information to be viewed at a glance. Features include automatic monitoring and shutdown. The combination of the pre-heat function start switch and the ability to switch over manually from idling to full load operation ensures a reliable, gentle start when operating the unit in cold ambient conditions.



## Separate air filter for the engine and airoend

Generously sized for increased reliability and operational life, also enables quick on-site filter change.

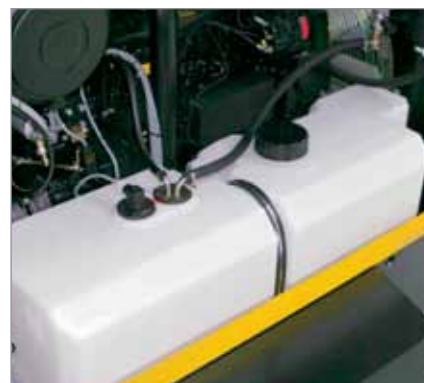

## Large capacity, transparent fuel tank:

When fully filled, the tank carries sufficient fuel for an entire work shift without the need for refuelling. For ease of operation, an automatic shutdown feature is activated when the fuel level becomes too low.



## The Portable Powerhouse

The synchronous three-phase generator (IP54) is optionally available either as a 8.5 or 13 kVA version. The brushless generator is maintenance-free and, depending on energy requirement, can be switched from continuous operation to energy-saving automatic start mode.



## Cool, clean compressed air

The compressed air is cooled to 7°C above ambient temperature. Accumulated condensate is able to drain away easily, as the compressed air cooler is installed at an angle, whilst the hot exhaust gasses from the motor are also used to aid condensate evaporation. This design consequently ensures reliable frost prevention during the winter months. Additional air treatment components need to be installed downstream from the aftercooler and centrifugal separator (e.g. filter combinations for concrete cleaning as per ZTV-ING) in order to achieve compressed air of a specified quality class (see last page). The differential pressure indicator enables filter status to be monitored quickly and easily.



## Tool storage space

There's plenty of space for tools and accessories in the conveniently integrated tool compartment.



## Proportional controller with manual wheel control\*

Continuously adjustable pressure, increased flexibility.

\*) available with 10 to 14 bar versions
















## Generator version:

The switch panel, which can be equipped with a cover flap if required, features IP 44 splash-protected sockets and a lockable main switch. The safety cut-out system with insulation monitoring makes earthing superfluous.






## Compressed air treatment systems

<p><b>System A</b></p> <ul style="list-style-type: none"> <li>• Cool</li> <li>• Condensate-free</li> </ul>	<p>Compressed air aftercooler</p>  <p>Centrifugal separator</p> 	<p>Cool, condensate-free compressed air (100 % saturated), for driving air tools and temporarily replacing stationary compressors</p>
<p><b>System F</b></p> <ul style="list-style-type: none"> <li>• Cool</li> <li>• Condensate-free</li> <li>• Filtered</li> </ul>	<p>Compressed air aftercooler</p>  <p>Centrifugal separator</p>  <p>Filter</p> 	<p>Cool, condensate-free compressed air (100% saturated), free from dirt particles, technically oil-free in accordance with applicable regulations</p>
<p><b>System B</b></p> <ul style="list-style-type: none"> <li>• Warmed</li> <li>• Dried</li> </ul>	<p>Compressed air aftercooler</p>  <p>Centrifugal separator</p>  <p>Heat recovery</p> 	<p>Dried compressed air, warmed to at least 20 °C, for working at sub-zero temperatures and with longer air lines</p>
<p><b>System G</b></p> <ul style="list-style-type: none"> <li>• Warmed</li> <li>• Dried</li> <li>• Filtered</li> </ul>	<p>Compressed air aftercooler</p>  <p>Centrifugal separator</p>  <p>Filter</p>  <p>Heat recovery</p> 	<p>Dried compressed air, warmed to at least 20 °C, free from dirt particles and technically oil-free in accordance with applicable regulations</p>
<p><b>Fresh air</b></p> <p>Partial flow as fresh air</p>	<p>Activated charcoal filter</p>  <p>Does not provide protection against carbon monoxide (CO) or other noxious gases</p>	<p>Odour-free fresh air connected via a separate quick-release coupling</p> <p>(Available only in combination with System F or System G variants)</p>

Additional air treatment systems for the MOBILAIR M 80 and M 100 are available upon request. Please contact Kaeser for further details.

## Dimensions

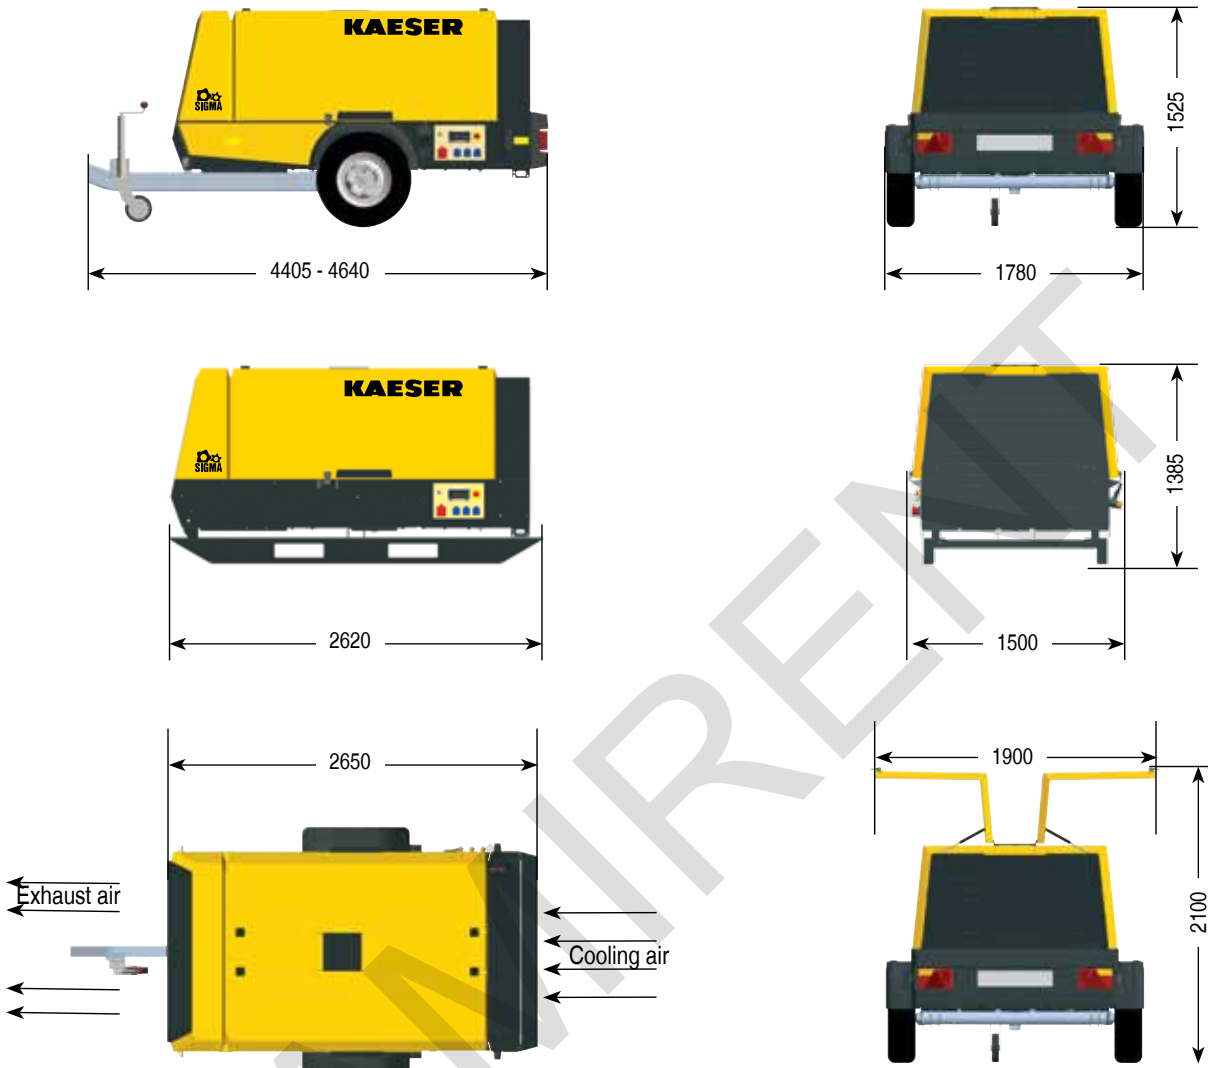

## Technical specifications – MOBILAIR M80 / M100

Model		M 80				M 100			
FAD (standard) With 8.5 kVA generator With 13 kVA generator	m <sup>3</sup> /min	8.1	6.8	6.1	5.5	10.2	8.5	7.2	6.4
	m <sup>3</sup> /min	8.1	6.8	5.5	-	10.2	8.5	6.4	-
	m <sup>3</sup> /min	8.1	6.8	-	-	10.2	8.5	-	-
At working pressure	(bar)	7	10	12	14	7	10	12	14
Drive engine (water-cooled)		Kubota V3307 Di-T				Kubota V3800 Di-T			
Rated motor power	(kW)	54.6				71.7			
Speed at full load	(rpm)	2450				2600			
Fuel tank capacity	(l)	150				150			
Operational weight (without generator)	kg	1480				1480			
Sound power level*	dB(A)	≤98				≤99			
Sound pressure level**	dB(A)	68				69			
Compressed air connection		3 x G <sup>3</sup> / <sub>4</sub> , 1 x G 1½							

\*) Guaranteed sound power level to directive 2000/14/EC – Stage 2, \*\*) Surface sound pressure level to ISO 3744, (r = 10 m)

# KAESER – The world is our home

As one of the world's largest manufacturers of rotary screw compressors, KAESER KOMPRESSOREN is represented throughout the world by a comprehensive network of branches, subsidiary companies and authorised partners in over 100 countries.

With innovative products and services, KAESER KOMPRESSOREN's experienced consultants and engineers help customers to enhance their competitive edge by working in close partnership to develop progressive system concepts that continuously push the boundaries of performance and compressed air efficiency. Moreover, the decades of knowledge and expertise from this industry-leading system provider are made available to each and every customer via the KAESER group's global computer network.

These advantages, coupled with KAESER's worldwide service organisation, ensure that all products operate at the peak of their performance at all times and provide maximum availability.

